


SED-2610


1U Rackmount 8-channel MPEG-4 Video Server with Two Way Audio




- MPEG-4 ASP compliant compression
- CIF up to Full D1 resolution at 25/30 fps per channel
- QoS enabled (L3) video streaming
- Digital time code embedded per channel
- Isolated digital input and output pairs per channel
- Serial ports (RS-485 or RS-232 or RS-422) per channel
- Two way audio ports per channel
- 1U form factor for rackmount

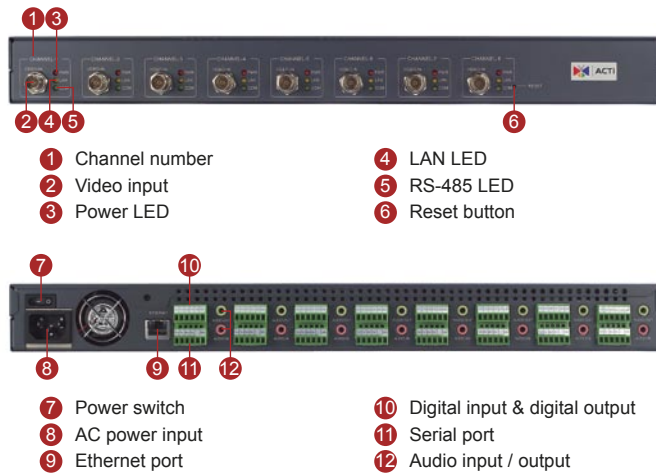

DIMENSION DIAGRAM

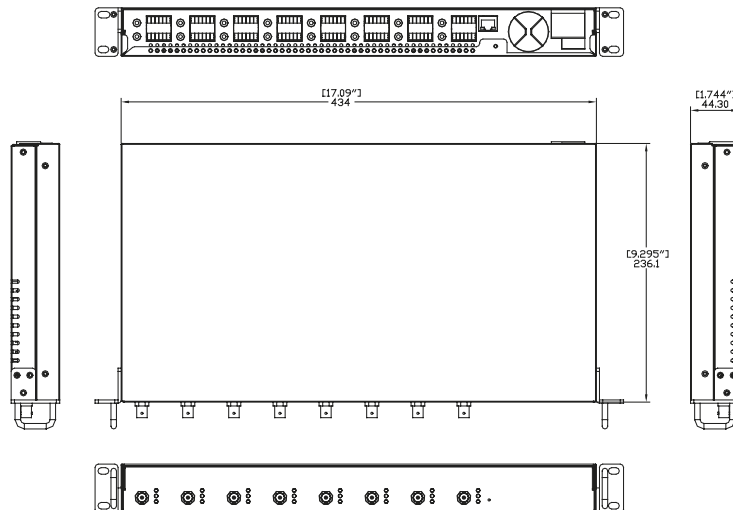

Unit: mm [inch]

**PRODUCT SPECIFICATION**

Video Compression		External I/O	
Compression	MPEG-4 ASP Compliant	Reset Button	Factory default
Picture Resolution	Full D1 (720x480 in NTSC, 720x576 in PAL); CIF (352x240 in NTSC, 352x288 in PAL); QCIF (160x112 in NTSC, 176x144 in PAL) (per channel)	LED	System status (per channel)
Bit Rate	28K ~ 3M bps (per channel)	Network	
Image Frame Rate	30fps at full D1 resolution (NTSC) 25fps at full D1 resolution (PAL) (per channel)	Ethernet	Ethernet (10/100Base-T), RJ-45 connector
Multi-stream	Up to 4 configurable frame rate/bit rate streams for preview and recording (per channel)	Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP
Video Input		Software	
Composite Input	8, CVBS, 1.0Vp-p with 75Ω loading, BNC connector	Web Browser	Microsoft Internet Explorer 6.0 or above
Video Output		SDK	ActiveX control, C SDK
Composite Output	N/A	PTZ Protocol*	Pelco-P_type1, Pelco-P_type2, Pelco-D, Dynacolor, Samsung, VCL, Videotrek, Kampro-V1, Kampro-V2
Audio Input		Security	Password protection: configured by the administrator
Compression	8kHz, Mono, PCM	Operating	
Audio Line Input	8, Unbalanced, 1.4 Vp-p, 1Vrms, 3.5 mm Phone Jack	Temperature	0 ~ 50 °C (32 ~ 122 °F)
Audio Output		Power	
Compression	8kHz, Mono, PCM	Power Requirement	AC 100 - 240 V 50/60 Hz
Audio Line Output	8, Unbalanced, 1.4 Vp-p, 1Vrms, 3.5 mm Phone Jack	Power Consumption	60 W
Alarm		Physical	
Input	2, TTL, terminal block (per channel)	Dimensions	434 mm x 236 mm x 44.3 mm (17.09" x 9.295" x 1.744")
Output	2, TTL, terminal block (per channel)	Weight	4.2 Kg
Remote Control		* These PTZ protocols are supported in ACTi Streaming Activator and Streaming Explorer. ** Adjust by inside jumper.	
Serial Port	RS-485 : half duplex, terminal block RS-422 : full duplex, terminal block RS-232** : full duplex, terminal block (per channel)		

ORDERING INFORMATION

Model Name	Description
SED-2610	1U Rackmount 8-channel MPEG-4 Video Server with Two Way Audio